



SPECIFICATIONS
SEV30SSH
RANGE HOODS

Barcelona® Collection, Seville™ Power Unit Insert
500 CFM/11.5 SONES @ 0.10" WG. HVI CERTIFIED 120 Volts, 2.8 amps, 60 hz.

• Dimensions

Overall bottom projection - 10¹⁵/₁₆"
Height - 10¹/₄"
Width: 31¹/₈"

• Hood Body

All metal cold rolled with stainless steel fascia.

• Motor

3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz., 2.8 amps.

• Lighting

Two - Hi spot ES 16, 50 watt maximum halogen lights.

• Ducting Options

Vertical ducting: 6" round duct adapter complete with polymeric back draft damper.

• Blower Wheel

Dual inlet, electronically balanced polymeric centrifugal blower wheel, 5²⁷/₃₂" width 59 paddles.

• Cut Out Opening Size


Width 30"
Depth - 10"

• Filters


Three - Model SVGF03, modular aluminum, dishwasher safe grease filters (included).

• Available Finishes

Stainless Steel.

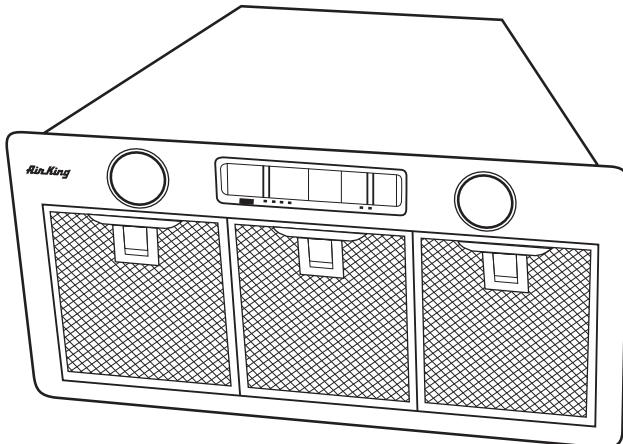

SEV30SS

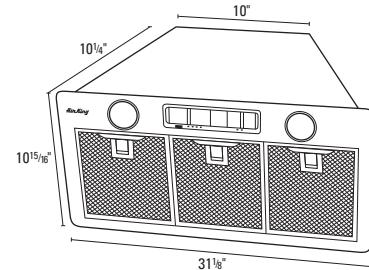

PERFORMANCE

	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.1	0.125	0.25	0.375	0.5	0.75	1.0			
Air Flow - CFM	510	500	497	485	472	459	432	404	11.5	2750	460

PROJECT				ARCHITECT							
LOCATION				ENGINEER							
CONTRACTOR				SUBMITTED BY		DATE					
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015